



CONSTRAINTS = BETTER INTEROPERABILITY (Via tighter operating point definition)

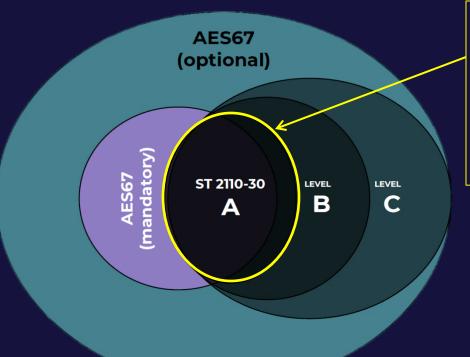

PRIMARY OPERATING POINT FOR THIS DEMONSTRATION:

- 1 msec packet times
- 8 channels per stream
- Common PTP operating point per AES-R16-2016
- RTP offset = 0 (unique to ST 2110-30)

CONSTRAINTS = BETTER INTEROPERABILITY (Via tighter operating point definition)

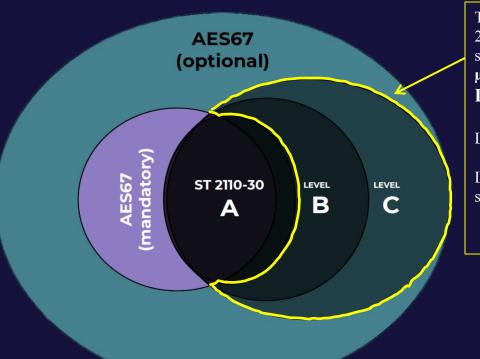

These two operating points (ST 2110-30 Level B & Level C) both support a shorter packet time of **125** µs, ideal for low-latency

#### LIVE PRODUCTION

LEVEL B: up to 8 channels/stream

LEVEL C: up to 64 channels per

stream

CONSTRAINTS = BETTER INTEROPERABILITY (Via tighter operating point definition)